



ADDENDUM NO. 3

Date: June 25, 2018

Bid Date: July 2, 2018
at 3:00 P.M. (Local Time)

Bid Name SW 40th Extension and SW 47th Ave Trail

Bid No.: WSPP-180086-DM

NOTE: This Addendum has been issued only to the holders of record of the specifications and to the attendees of the non-mandatory pre-bid conference held on June 12, 2018.

The original Specifications remain in full force and effect except as revised by the following changes which shall take precedence over anything to the contrary:

1. The deadline for questions was June 19, 2018.
2. Please find attached:
 - a) Copy of the blackout period information (Financial Procedures Manual Section 41-423 Prohibition of lobbying in procurement matters)) distributed during mandatory pre-bid meeting.

The following are answers/clarifications to questions received after the non-mandatory pre-bid conference:

3. Question: Sht.#10 missing from plans

Answer: Correct. Please refer to the cover sheet of the SW 40th Boulevard Extension Project. This sheet was not used.

INDEX OF ROADWAY PLANS


SHEET NO.	SHEET DESCRIPTION
1	KEY SHEET
2	GENERAL NOTES
SQ SHEETS	SUMMARY OF QUANTITIES
4	SUMMARY OF DRAINAGE STRUCTURES
5	PREDEVELOPMENT DRAINAGE MAP
6	POSTDEVELOPMENT DRAINAGE MAP
7-9	ROADWAY TYPICAL SECTIONS
10	NOT USED

4. Question: No typical Section from Sta.106+00 to 110+00

Answer: Correct. This section of roadway has a varying typical section. Spot elevations are provided on sheets 17 and 18 cross-sections are provided on sheets 24 and 25 to communicate the roadway design from Sta. 106+00 to Sta. 110+00.

5. Question: Ribbon Curb is shown in pay items, but we cannot locate on plans.

Answer: Please see the Stabilized Path Detail on Sheet 11:

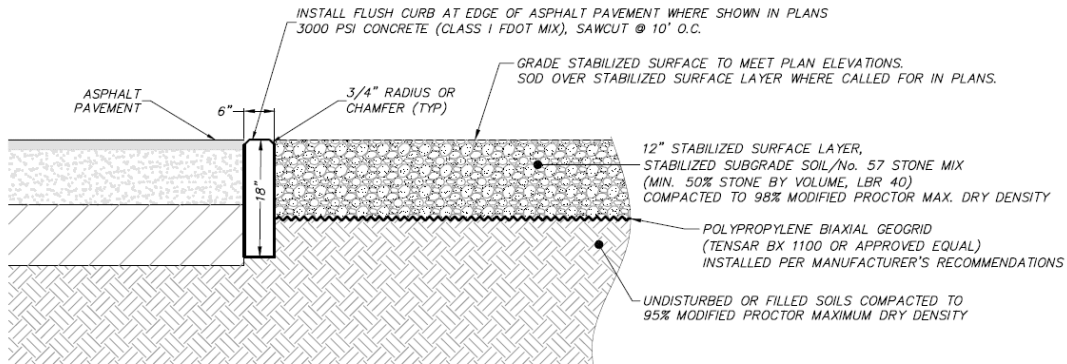


NOTES:

1. STONE LAYER SHALL CONFORM TO THE FOLLOWING:
 - A. CLEAN, NON-PLASTIC AGGREGATE, FREE FROM DELETERIOUS OR FOREIGN MATTER, MANUFACTURED FROM CRUSHED ROCK OR RECLAIMED PORTLAND CEMENT CONCRETE (LIMESTONE/LIMEROCK NOT ALLOWED).
 - B. LA ABRASION PER FDOT STANDARD SPECIFICATIONS SECTION 901.
 - C. GRADATION OF STONE TO CONFORM TO FDOT STANDARD SPECIFICATIONS SECTION 901.

Ribbon Curb shall be provided at the edge of asphalt pavement when adjacent to the Stabilized Path. The curb and path location is shown on sheets 17, 18, 19, and 20

6. Question: Plans indicate Silt Fence, but Pay item is for Staked Turbidity Barrier

Answer: Please use Pay item 0104 10 "Sediment Barrier" instead of Pay item 0104 12. Refer to the silt fence detail on Sheet 11 for typical installation.

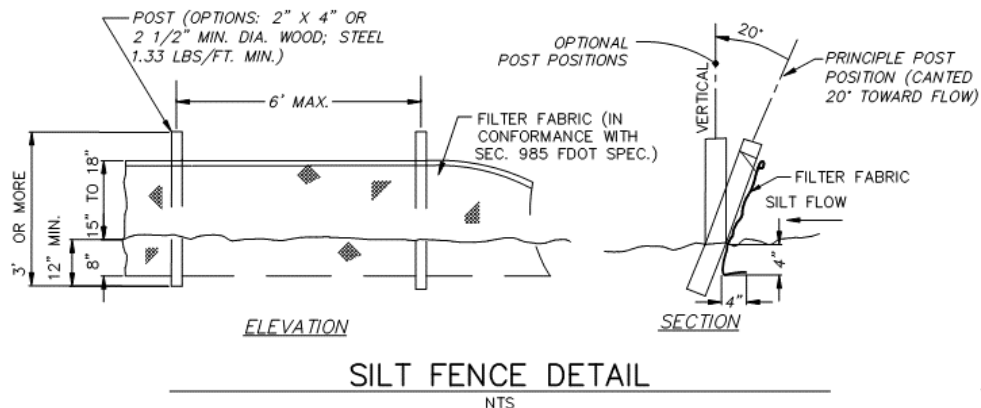

7. Question: The Typical Sections show “Type I Concrete Separator (Option II)”, but there is no Pay item
Answer: Please use Pay item 0520 70 Concrete Traffic Separator, Special –Variable Width with a Plan Quantity of 168 SY.
8. Question: Does the bidding contractor have to be a DOT Certified contractor in order to bid on this job?
Answer: Yes. Please see Article 3- Qualifications of Bidders, Section 3.01-D of the Instructions to Bidders. A FDOT Certificate of Qualification with FDOT Approved Work Classes is a required submittal from the entity whom the City would be entering into a contract with. This is a requirement of the Florida Department of Transportation’s County Incentive Grant Program which is partially funding this project.

ACKNOWLEDGMENT: Each Proposer shall acknowledge receipt of this Addendum No. 3 by his or her signature below, **and a copy of this Addendum to be returned with proposal.**

CERTIFICATION BY PROPOSER

The undersigned acknowledges receipt of this Addendum No. 3 and the Proposal submitted is in accordance with information, instructions, and stipulations set forth herein.

PROPOSER: _____
BY: _____
DATE: _____

CITY OF _____ FINANCIAL SERVICES
GAINESVILLE PROCEDURES MANUAL

41-423 Prohibition of lobbying in procurement matters

Except as expressly set forth in Resolution 060732, Section 10, during the black out period as defined herein no person may lobby, on behalf of a competing party in a particular procurement process, City Officials or employees except the purchasing division, the purchasing designated staff contact. Violation of this provision shall result in disqualification of the party on whose behalf the lobbying occurred.

Black out period means the period between the issue date which allows for immediate submittals to the City of Gainesville Purchasing Department for an invitation for bid or the request for proposal, or qualifications, or information, or the invitation to negotiate, as applicable, and the time the City Officials and Employee awards the contract.

Lobbying means when any natural person for compensation, seeks to influence the governmental decision making, to encourage the passage, defeat, or modification of any proposal, recommendation or decision by City Officials and Employees, except as authorized by procurement documents.